LBGH SERIES

LBGH1526

15KVA

key features

easy & fast

Compact design for freight solar panel array Deep Sea control system Outlet kit for plug & play

operator friendly

latest inverter battery technology One touch battery hydraulic single side engine maintenance easy access to cooling system easy access to battery bay

cost & carbon

75% + reduction in duty cycle detailed diagnostic 80% + reduction in emissions remote monitoring 50% + fuel cost reduction

control and report

programmable

reduce carbon, cost, efficient & user friendly





Looking for more than just a regular rental company, come join the bug squad.






equipment specification

HYBRID

LBGH15-26

15KVA

RENTAL SPEC

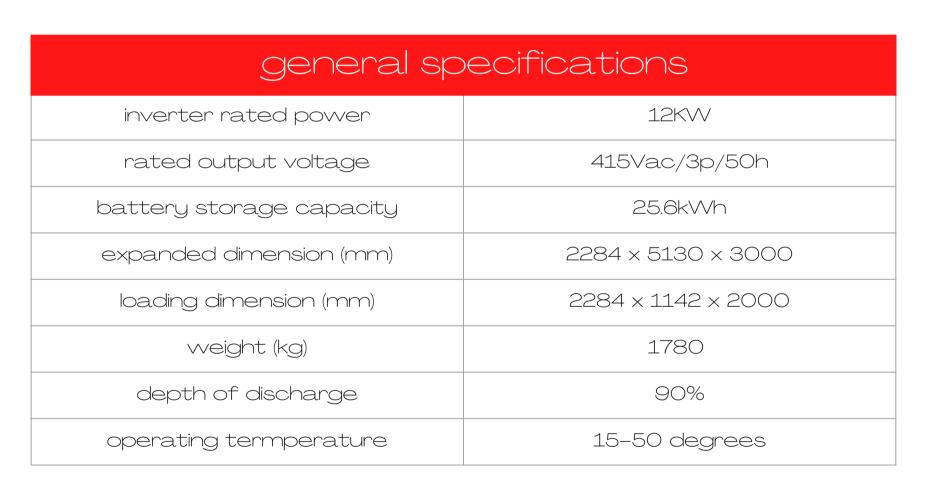



solar optional		
model	smd325m-6x12	
power	1.6KW	
power tolerance	0–5	
max power voltage (vm)	38.5vdc	
max power current (lm)	8.45a	
module efficiency (nm)	16.1%	











integrated solar povver invertor		
model	vm 11 5500–48	
max solar charger current	100a	
ac input voltage range	90-280Vac	
max ac charger current	80a	
max conversion efficiency	93.5%	
qty	3pcs	

energy storage battery		
model	m48100	
type	lfp	
rated capacity	100ah	
rated voltage	51.2vdc	
discharge depth	90%	
charger/discharger current	0.5c	
qty	5pcs	



other information		
model	20060h48b	
exhaust air volume	492cfm	
rated power	48 W	
rated voltage	48vdc	
max noise level	68 dba	













